

BL600

»»» Main features

- Hydraulic lift with vertical motion and scissor-mechanism
- Provided with an exclusive mechanical system to decrease speed in the last descent step
- "Dead-man" control.
- Lift with incorporated wheel changing hatch
- Anti-slip edge for side stand
- Retractable access ramp for smaller bulk when the lift is raised
- Front wheel locking hand clamp with multiple positioning on the lifting platform.
- Bottom limit stop with shock absorbing pads
- Constant descent speed, irrespective of the load lifted
- Front wheel stop
- Mechanical safety device that puts the lift in safe position in the event of hydraulic circuit failure
- Counterbalancing valve that trips to prevent uncontrolled movements in descent in the event of pipe breakage.




This product is approved by:



»» Main accessories on request


- Side extensions for lifting city cars, for garden equipment (small tractors, etc.) and for three-wheel motor vehicles.
- Stand support extension for custom models
- Exhaust oil recovery tank
- Series of motorcycle locking belts
- Drive-through kit
- Pneumatic clamp for front wheel locking

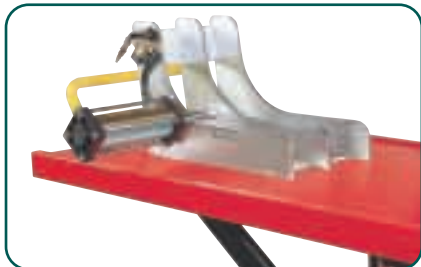


» Pneumatic clamp for front wheel locking



» Support for side stand for custom models

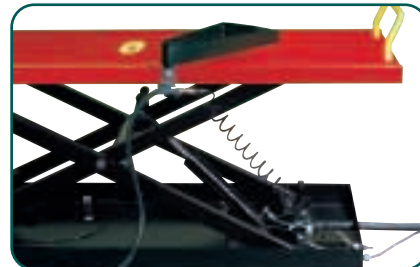

» Exhaust oil recovery tank



» Drive-through kit



» Version with side extensions



» The control unit can be easily located in the desired position



» All controls are of the "dead-man" type



» Incorporated wheel changing hatch

Technical data

Maximum width	800 mm
Maximum length	2720 mm
Maximum height	1200 mm
Minimum height	155 mm
Lift	
(length x width)	2300 x 800 mm
Maximum capacity	600 kg
Ascent/descent time	30 sec
Lift weight	250 kg
Operating voltage	230-400V/3Ph/50-60 Hz
Power absorption	0.75 kW
Air supply pressure	8-10 bar